


NU-AH370 / NU-AH360

NU-AH Series

370 W / 360 W

The Project Solution

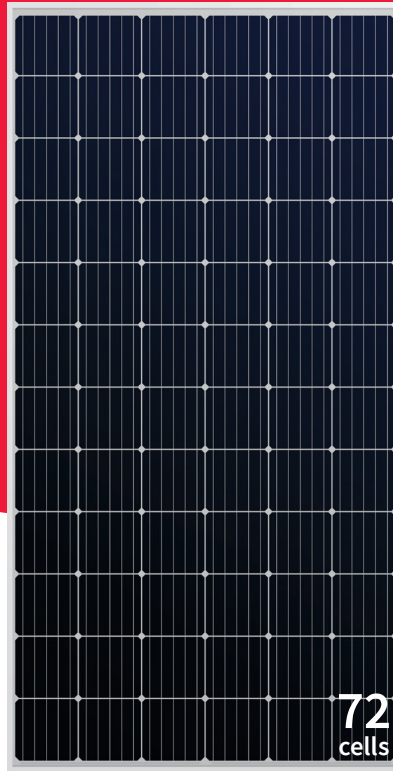

Powerful product features



Guaranteed positive power tolerance (0/+5%)



Monocrystalline silicon photovoltaic modules



Portrait or landscape mounting



Tested and certified
TÜV, IEC/EN61215, IEC/EN61730



Safety class II / CE



Application class A

Fire rating class C



PERC Technology
High module efficiency 19.1%



Robust product design
PID resistance test passed
Salt mist test passed (IEC61701)



5 busbar technology
Improved reliability
Higher efficiency
Reduced series resistance

Your solar partner for life



60 years of solar expertise



Linear power output guarantee



Product guarantee



50 million PV modules installed



Local support team in Europe



Top PV brand award



SHARP
Be Original.

Electrical data (STC)

		NU-AH370	NU-AH360	
Maximum power	P_{max}	370	360	W_p
Open-circuit voltage	V_{oc}	47.8	47.4	V
Short-circuit current	I_{sc}	9.97	9.81	A
Voltage at point of maximum power	V_{mpp}	39.4	39.0	V
Current at point of maximum power	I_{mpp}	9.39	9.23	A
Module efficiency	η_m	19.1	18.6	%

STC = Standard Test Conditions: irradiance 1,000 W/m², AM 1.5, cell temperature 25 °C.

Rated electrical characteristics are within $\pm 10\%$ of the indicated values of I_{sc} , V_{oc} and 0 to +5% of P_{max} (power measurement tolerance $\pm 3\%$).

Reduction of efficiency from an irradiance of 1,000 W/m² to 200 W/m² ($T_{module} = 25\text{ °C}$) is less than 3%.

Electrical data (NOCT)

		NU-AH370	NU-AH360	
Maximum power	P_{max}	274.43	267.48	W_p
Open-circuit voltage	V_{oc}	44.3	44.0	V
Short-circuit current	I_{sc}	8.06	7.93	A
Voltage at point of maximum power	V_{mpp}	36.3	36.0	V
Current at point of maximum power	I_{mpp}	7.56	7.43	A

Module operating temperature at 800 W/m² irradiance, air temperature of 20 °C, wind speed of 1 m/s. NOCT = 45 °C.

Mechanical data

Length	1,956 mm
Width	992 mm
Depth	35 mm
Weight	22.2 kg

Temperature coefficient

P_{max}	-0.39%/°C
V_{oc}	-0.30%/°C
I_{sc}	0.06%/°C

Limit values


Maximum system voltage	1,000 VDC
Over-current protection	15 A
Temperature range	-40 to +85 °C
Max. mechanical load (snow/wind)	2,400 Pa

Tested snow load (IEC61215 test pass*) 5,400 Pa

Packaging data

Modules per pallet	30 pcs
Pallet size (L x W x H)	1.995 m x 1.150 m x 1.123 m
Pallet weight	740 kg

Dimensions (mm)

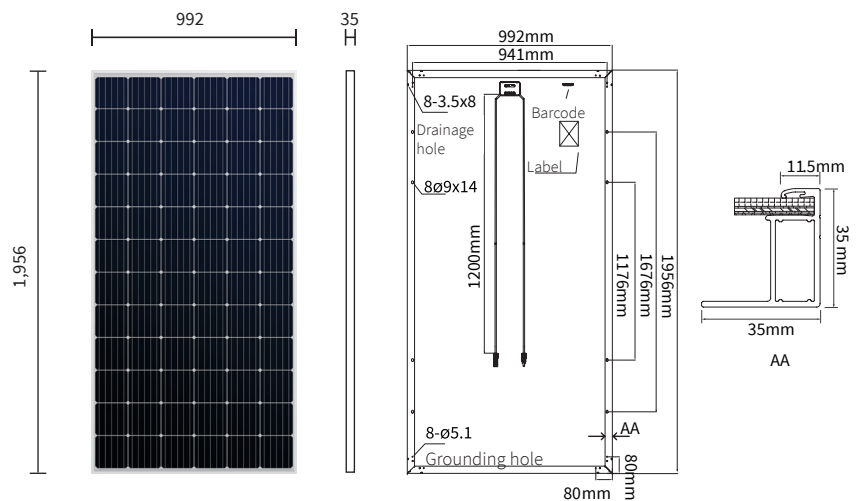

*Please refer to Sharp's installation manual for details.

General data

Cells	monocrystalline 156.75 mm x 156.75 mm, 72 cells in series
Front glass	anti-reflective high transmissive low iron tempered glass, 3.2 mm
Frame	anodized aluminium alloy, silver
Connection box	IP68, 3 bypass diodes
Cable	4.0 mm ² , length 1,200 mm
Connector	MC4 (Multi Contact, Stäubli Electrical Connectors AG)

Note: Technical data is subject to change without prior notice. Before using Sharp products, please request the latest data sheets from Sharp. Sharp accepts no responsibility for damage to devices which have been equipped with Sharp products on the basis of unverified information. The specifications may deviate slightly and are not guaranteed. Installation and operating instructions are to be found in the corresponding handbooks, or can be downloaded from www.sharp.eu/solar. This module should not be directly connected to a load.

Contact Sharp

SHARP Electronics GmbH
Energy Solutions
Nagelsweg 33 - 35
20097 Hamburg, Germany
T: +49 (0) 40 / 2376-2436
E: SolarInfo.Europe@sharp.eu

SHARP
Be Original.

Sharp.co.uk/energysolutions | #SharpBeOriginal